



24 Position Panel Mount Connector

BENEFITS


- Reduced space
- High performance against vibrations
- Possibility to make point-to-point harness
- Polarization key
- Used across different platforms

DESCRIPTION

- 24 position connector (male and female)
- Strain relief & polarization key (64 options)
- Using high reliability contacts
- Parts: 284873-1 & 284874-1 (excluding contacts)

MAIN CHARACTERISTICS

- Rated current: max. 10 A
- Temperature Range: -40°C, +125°C
- Voltage: 137 VDC max.
- Nominal battery voltage 110 VDC
- Mating cycles: 100 (gold plated contacts)

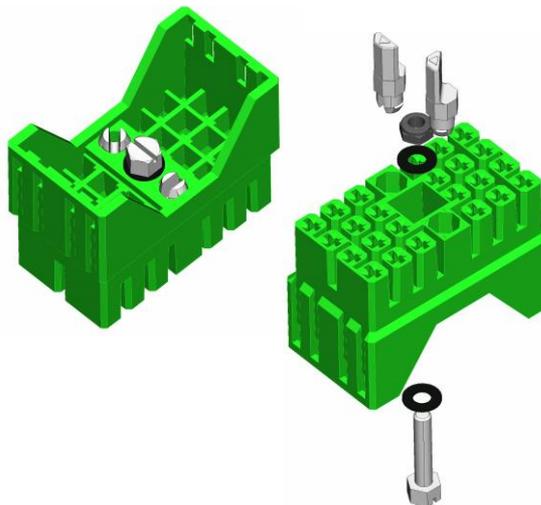

1 3



TRAIN CONTROL >



CAB CONTROL >
TRAIN CONTROL >



NFF 16101
UL 94-V0
EN45545
CEI EN 50155



EVERY CONNECTION COUNTS

