

AUXILIARY LIGHTS RANGE







Alpha 225 Pro Xenon

Alpha 225 Xenon

Alpha 225

Alpha 175 LED

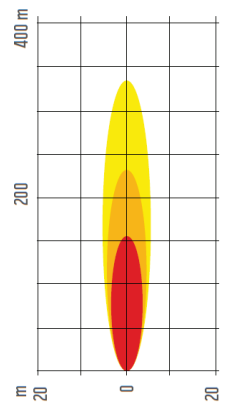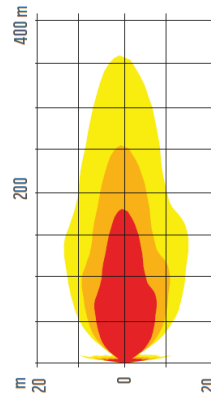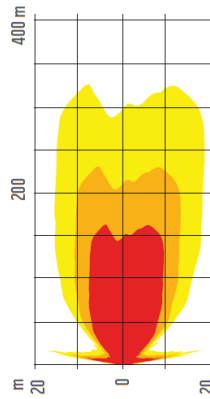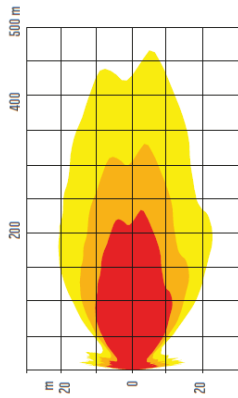

Part Numbers	D14164	D14165	D14166	D14167
Bulb	35W D1S, GEN 5 integrated	35W D1S, GEN 5 integrated	H1 bulb not integrated	LED module
Light Pattern	ECE Position Light LED ECE Broad 45	ECE Position Light LED ECE Broad 20	ECE Pilot Light ECE Broad 25	ECE Pilot Light LED ECE Broad 25
Consumption	43W	43W	70W max	8W
Voltage	24V	24V	-	multi voltage 12-24V
Connection	Wiring harness	Wiring harness	Grommet	Wiring harness
Operating Temp	- 40°C to +60°C	- 40°C to +60°C	- 40°C to +60°C	- 40°C to +60°C
Housing	aluminium	black fibre reinforced plastic	black fibre reinforced plastic	black fibre reinforced plastic
Lens	hardened glass lens	plastic lens	plastic lens	hardened glass lens
Mounting	pedestal	pedestal	pedestal	pedestal
Dimensions (mm)	Ø 225 x 151	Ø 225 x 153	Ø 225 x 153	Ø 175 x 104



Dalroad

Bramingham Business Park, Enterprise Way, Luton, Bedfordshire, LU3 4BU
 T: 01582 505 252 | F: 01582 560 060 | W: www.dalroad.com | E: sales@dalroad.com

