


FIRERATED ALUMINIUM ENCLOSED SAFETY SWITCHES / ISOLATORS 16-200A



- F200 3H (FR) / F300 2H (FR3)
- IP66 rating in enclosures A2 and A3
- IP65 rating in enclosures A4 and A5
- Padlockable
- Door interlock with defeat mechanism
- ON-locking facility as option
- Good corrosion and UV resistance
- Excellent for hard weather conditions

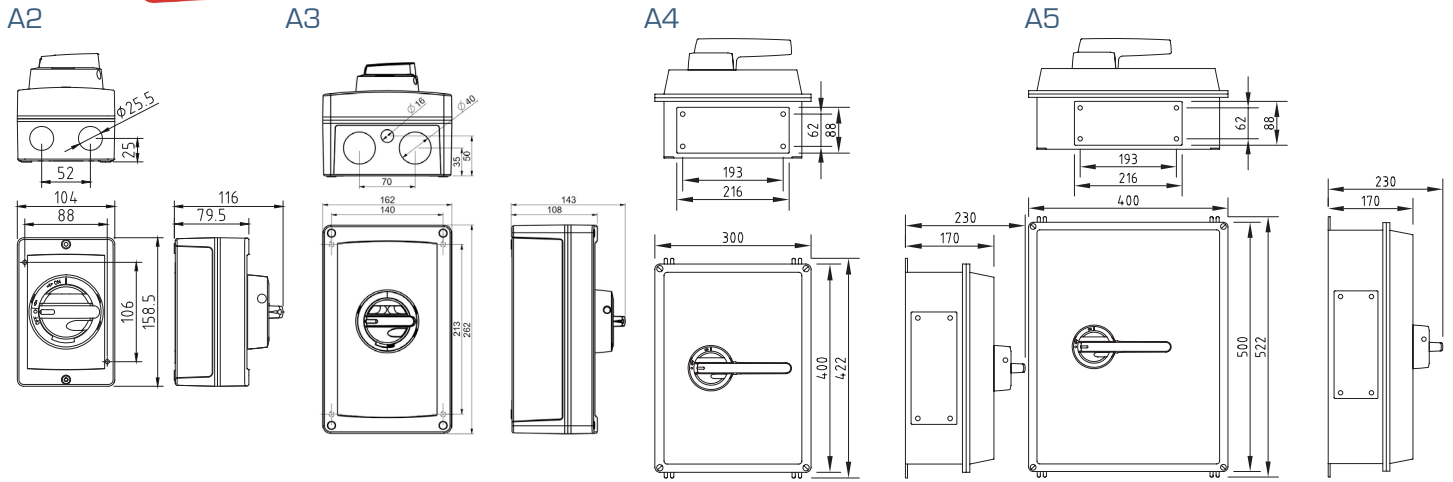

Type		AC-21	400 V	AC-22	400 V	AC-23	400 V	AC-23	690 V	EAN code		Enclosure	Weight kg
			415 V		415 V					415 V	F200		
F200 3H	F300 2H	I _n / A	I _n / A	I _n / A	I _n / A	P / kW	I _n / A**	P / kW**	6419410...				
3 poles													
KEA 316U FR	KEA 316U FR3	25 A	16 A	16 A	16 A	7.5 kW	16 A	11 kW	A2	0.8	
KEA 325U FR	KEA 325U FR3	40 A	25 A	25 A	25 A	11 kW	25 A	22 kW	A2	0.8	
KEA 340U FR	KEA 340U FR3	63 A	40 A	40 A	40 A	22 kW	32 A	30 kW	A2	0.8	
KEA 363U FR	KEA 363U FR3	80 A	63 A	40 A	40 A	22 kW	40 A	37 kW	A3	2	
KEA 380U FR	KEA 380U FR3	100 A	80 A	63 A	30 kW	40 A	40 A	37 kW	A3	2	
KEA 3125 FR	KEA 3125 FR3	160 A	125 A	100 A	55 kW	80 A	80 A	55 kW	A4	8.6	
KEA 3160 FR	KEA 3160 FR3	200 A	160 A	135 A	75 kW	125 A	125 A	90 kW	A4	8.6	
KEA 3200C FR	KEA 3200C FR3	200 A	200 A*	200 A	110 kW	-	-	-	A4	8.6	
4 poles													
KEA 416U FR	KEA 416U FR3	25 A	16 A	16 A	16 A	7.5 kW	16 A	11 kW	A2	0.9	
KEA 425U FR	KEA 425U FR3	40 A	25 A	25 A	25 A	11 kW	25 A	22 kW	A2	0.9	
KEA 440U FR	KEA 440U FR3	63 A	40 A	40 A	40 A	22 kW	32 A	30 kW	A2	0.9	
KEA 463U FR	KEA 463U FR3	80 A	63 A	40 A	40 A	22 kW	40 A	37 kW	A3	2.1	
KEA 480U FR	KEA 480U FR3	100 A	80 A	63 A	30 kW	40 A	40 A	37 kW	A3	2.1	
KEA 4125 FR	KEA 4125 FR3	160 A	125 A	100 A	55 kW	80 A	80 A	55 kW	A4	8.7	
KEA 4160 FR	KEA4160 FR3	200 A	160 A	135 A	75 kW	125 A	125 A	90 kW	A4	8.7	
KEA 4200C FR	KEA 4200C FR3	200 A	200 A*	200 A	110 kW	-	-	-	A4	8.7	
6 poles													
KEA 616U FR	KEA 616U FR3	25 A	16 A	16 A	16 A	7.5 kW	16 A	11 kW	A3	2.3	
KEA 625U FR	KEA 625U FR3	40 A	25 A	25 A	25 A	11 kW	25 A	22 kW	A3	2.3	
KEA 640U FR	KEA 640U FR3	63 A	40 A	40 A	40 A	22 kW	32 A	30 kW	A3	2.3	
KEA 663U FR	KEA 663U FR3	80 A	63 A	40 A	40 A	22 kW	40 A	37 kW	A3	2.3	
KEA 680U FR	KEA 680U FR3	100 A	80 A	63 A	30 kW	40 A	40 A	37 kW	A3	2.3	
KEA 6125 FR	KEA 6125 FR3	160 A	125 A	100 A	55 kW	80 A	80 A	55 kW	A5	15	
KEA 6160 FR	KEA 6160 FR3	200 A	160 A	135 A	75 kW	125 A	125 A	90 kW	A5	15	
KEA 6200C FR	KEA 6200C FR3	200 A	200 A*	200 A	110 kW	-	-	-	A5	15	
8 poles													
KEA 816U FR	KEA 816U FR3	25 A	16 A	16 A	16 A	7.5 kW	16 A	11 kW	A3	2.4	
KEA 825U FR	KEA 825U FR3	40 A	25 A	25 A	25 A	11 kW	25 A	22 kW	A3	2.4	
KEA 840U FR	KEA 840U FR3	63 A	40 A	40 A	40 A	22 kW	32 A	30 kW	A3	2.4	
KEA 863U FR	KEA 863U FR3	80 A	63 A	40 A	40 A	22 kW	40 A	37 kW	A3	2.4	
KEA 880U FR	KEA 880U FR3	100 A	80 A	63 A	30 kW	40 A	40 A	37 kW	A3	2.4	

* 400/415 V ** Does not apply to FR3 models

Data subject to change without notice

Dalroad are authorised UK distributors of Katko safety switches and isolators. Contact Dalroad for further information on the Katko range on 01582 505 252 or email sales@dalroad.com.